

1-Ω Dual SPDT Analog Switch, 2:1 Multiplexer / 1:2 Demultiplexer

Features

- 1.8V to 5.5V Single Supply Operation
- Low ON-State Resistance: 1Ω (typ)
- -3dB Bandwidth: 90 MHz
- Fast Switching Speed
- Break-Before-Make Operation
- Rail-to-Rail Operation
- TTL/CMOS Logic Compatible
- Supports Analog and Digital Signals
- Small Packaging: MSOP10, DFN10-3x3
- Extended Industrial Temperature
Range: -40°C to +125°C

Applications

- Computer Peripherals
- Audio and Video Signal Switching
- Portable Devices
- Communication Circuits
- Signal Gating, Multiplexer/Demultiplexer
- Signal Modulation or Demodulation
- Sample and Hold Systems
- Telecom Signal Switching
- Battery Power Systems


Rev1.0

Copyright©2018 Cosine Nanoelectronics Inc. All rights reserved.
The information provided here is believed to be accurate and reliable. Cosine Nanoelectronics assumes no liability for inaccuracies and omissions. Specifications described and contained here are subjected to change without notice on the purpose of improving the design and performance. All of this information described herein should not be implied or granted for any third party.

General Description


The COS5A23159 is a low voltage dual channel, bidirectional, single-pole double-throw (SPDT) CMOS analog switch. The device can pass signals with rail-to-rail swing from a single supply 1.8V to 5.5V. The switches conduct equally well in both directions when it is on. The digital inputs have 0.8V to 2.4V logic thresholds, ensuring TTL/CMOS logic compatibility when using a +5V supply.

The COS5A23159 offers low ON-state resistance and excellent ON-state resistance matching with the break-before-make feature which prevents signal distortion during the transferring of a signal from one channel. The device is suitable for a wide variety of low power applications including signal gating, chopping, modulation and multiplexing.

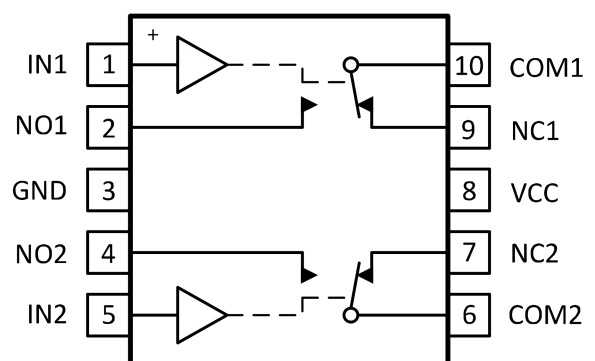

Pin Diagram

1. Pin Configuration and Functions

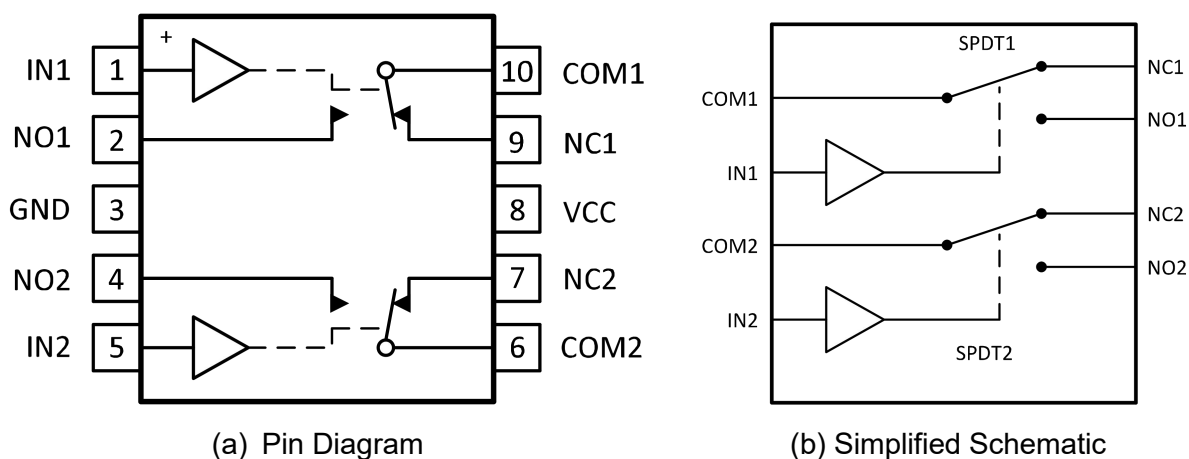

Truth Table

IN Logic	NC to COM, COM to NC	NO to COM, COM to NO
L	On	Off
H	Off	On

Pin Description

PIN			FUNCTION
NO.	NAME	I/O	
1	IN1	I	Logic control input
2	NO1	I/O	Normally open terminal. Can be an input or output
3	GND	-	Ground
4	NO2	I/O	Normally open terminal. Can be an input or output
5	IN2	I	Logic control input
6	COM2	I/O	Common terminal. Can be an input or output
7	NC2	I/O	Normally closed terminal. Can be an input or output
8	VCC	-	Power supply
9	NC1	I/O	Normally closed terminal. Can be an input or output
10	COM1	I/O	Common terminal. Can be an input or output

2. Package/Ordering Information

Order Number	Package	Package Option	Marking Information
COS5A23159	MSOP10	Tape and Reel, 3000	COS23159
COS5A23159DN	DFN10-3x3	Tape and Reel, 3000	COS23159

3. Product Specification

3.1 Absolute Maximum Ratings ⁽¹⁾

Parameter	Min	Max	Unit
Supply voltage range (V_{CC})	-0.5	6.0	V
Analog voltage range (V_{NC} , V_{NO} , V_{COM})	-0.5	$V_{CC} + 0.5$	V
Digital input voltage range (V_{IN})	-0.5	6.0	V
Continuous current into any terminal	-200	200	mA
Peak current into any terminal	-400	400	mA
Operating junction temperature	-40	+125	°C
Storage temperature	-55	+150	°C

(1) Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

3.2 Thermal Data

Parameter	Rating	Unit
Package Thermal Resistance, $R_{\theta JA}$ (Junction-to-ambient)	160 (MSOP10)	°C/W

3.3 Recommended Operating Conditions

Parameter	Min	Max	Unit
V_{CC}	1.8	5.5	V
V_{NC} , V_{NO} , V_{COM}	0	V_{CC}	
V_{IN}	0	V_{CC}	


3.4 Electrical Characteristics

($V_{CC}=4.5V$ to $5.5V$, $T_A=-40^{\circ}C$ to $85^{\circ}C$, unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Analog Switch						
Analog signal range	V_{COM}, V_{NO}, V_{NC}		0		V_{CC}	V
Peak On-resistance	R_{peak}	V_{NC} or $V_{NO} = 0$ to V_{CC} , $I_{COM} = -10mA$, Switch On, See Figure 1		0.8	1.5	Ω
On-state resistance	R_{on}	V_{NC} or $V_{NO} = 2.5V$, $I_{COM} = -10mA$, Switch On, See Figure 1		0.7	1.1	Ω
On-state resistance match between channels	ΔR_{on}	V_{NC} or $V_{NO} = 2.5V$, $I_{COM} = -10mA$, Switch On, See Figure 1		0.05	0.1	Ω
On-state resistance flatness	$R_{on(Flat)}$	V_{NC} or $V_{NO} = 0$ to V_{CC} , $I_{COM} = -10mA$, Switch On, See Figure 1		0.1	0.35	Ω
NO, NC OFF leakage current	$I_{NO(OFF)}, I_{NC(OFF)}$	$V_{COM} = 1V$ to $4.5V$, V_{NO} or $V_{NC} = 1V$ Or $V_{COM} = 1V$ to $4.5V$, V_{NO} or $V_{NC} = 4.5V$, Switch OFF, See Figure 2	-100	2	100	nA
NO, NC ON leakage current	$I_{NO(ON)}, I_{NC(ON)}$	$V_{COM} = Open$, V_{NO} or $V_{NC} = 1V$ Or $V_{COM} = Open$, V_{NO} or $V_{NC} = 4.5V$, Switch ON, See Figure 3	-100	2	100	nA
COM OFF leakage current	$I_{COM(OFF)}$	V_{NO} or $V_{NC} = 0$ to $5.5V$, $V_{COM} = 5.5V$ to 0 , Switch OFF, See Figure 2	-2	0.1	2	μA
COM ON leakage current	$I_{COM(ON)}$	V_{NO} or $V_{NC} = Open$, $V_{COM} = 1V$, Or V_{NO} or $V_{NC} = Open$, $V_{COM} = 4.5V$, Switch ON, See Figure 3	-100	2	100	nA

Digital Control Input (IN1, IN2)						
Input logic high	V_{IH}		2.4		5.5	V
Input logic low	V_{IL}		0		0.8	V
Input leakage current	I_{IH}, I_{IL}	$V_{IN} = 0$ or 5.5	-100		100	nA
Switch Dynamic Characteristics						
Turn-on time	t_{ON}	$V_{COM} = V_{CC}, R_L=50\Omega,$ $C_L = 35pF$, See Figure 5		8	16	ns
Turn-off time	t_{OFF}	$V_{COM} = V_{CC}, R_L=50\Omega,$ $C_L = 35pF$, See Figure 5		5	8	ns
Break-Before-Make Delay	t_{BBM}	V_{NO} or $V_{NC}= V_{CC}, R_L=50\Omega,$ $C_L = 35pF$, See Figure 6	1		14	ns
Charge Injection	Q	$V_{GEN}=0V, R_{GEN}=0,$ $C_L = 1$ nF, See Figure 10		-7		pC
NO or NC OFF Capacitance	C_{OFF}	$V_{NC} = V_{NO} = V_{CC}$ or GND, Switch OFF, See Figure 4		15		pF
NO or NC ON Capacitance	C_{ON}	$V_{NC} = V_{NO} = V_{CC}$ or GND, Switch ON, See Figure 4		55		pF
COM ON-Capacitance	C_{COM}	$V_{COM} = V_{CC}$ or GND, Switch ON, See Figure 4		55		pF
Digital Input Capacitance	C_i	$V_{IN} = V_{NO}$ or GND, See Figure 4		2		pF
OFF-Isolation	V_{ISO}	$R_L = 50\Omega, C_L = 15pF,$ $V_{NC} = 1V_{RMS}, f = 1MHz$ Switch OFF, See Figure 7		-64		dB
Crosstalk	X_{TALK}	$R_L = 50\Omega, C_L = 15pF,$ $V_{NC} = 1V_{RMS}, f = 1MHz$ Switch ON, See Figure 8		-64		dB
Bandwidth	BW	$R_L = 50\Omega, C_L = 15pF,$ $V_{NC} = 1V_{RMS}, f = 1MHz$ Switch ON, See Figure 9		90		MHz
Total Harmonic Distortion	THD	$R_L = 600\Omega, C_L = 50pF,$ $f = 20$ Hz to 20kHz Switch ON, See Figure 11		0.005		%
Power Supply						
V_{CC} supply current	I_{CC}	$V_{IN} = 0$ or $V_{CC},$ Switch ON or OFF			0.1	μA

4. Test Circuits and Timing Diagrams

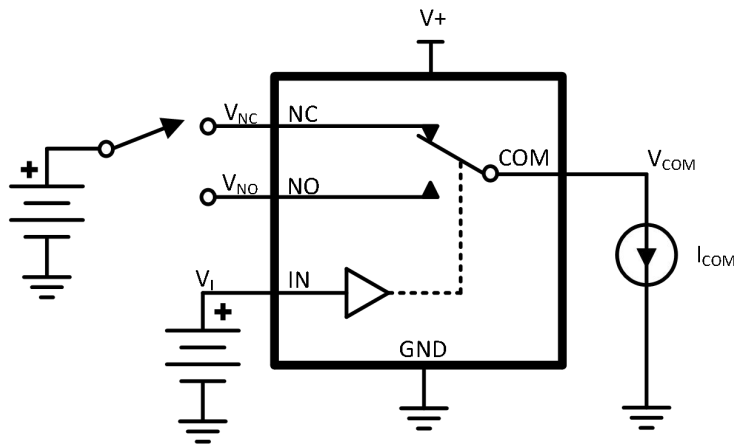


Channel ON

$$r_{on} = \frac{V_{COM} - V_{NO} \text{ or } V_{NC}}{I_{COM}} \Omega$$

$$V_I = V_{IH} \text{ or } V_{IL}$$

Figure 1. ON-State Resistance (R_{ON})

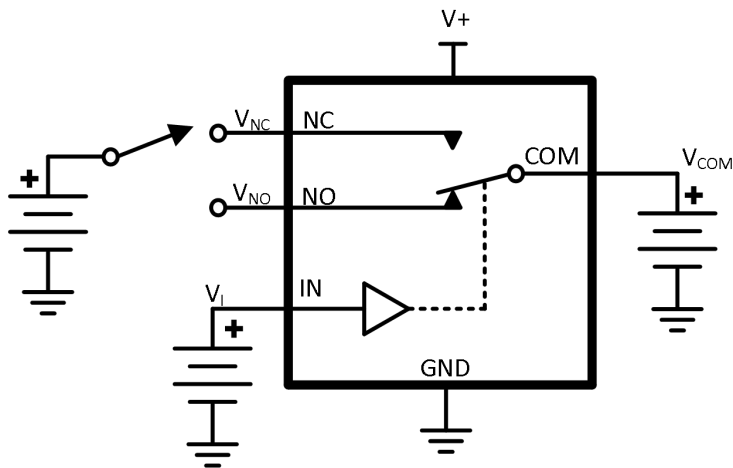


OFF-State Leakage Current

Channel OFF

$$V_I = V_{IH} \text{ or } V_{IL}$$

Figure 2. OFF-State Leakage Current

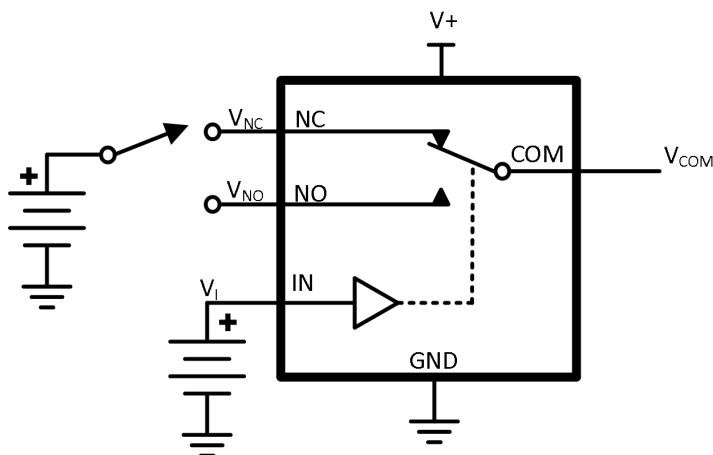

ON-State Leakage Current

Channel ON

$$V_I = V_{IH} \text{ or } V_{IL}$$

Figure 3. ON-State Leakage Current

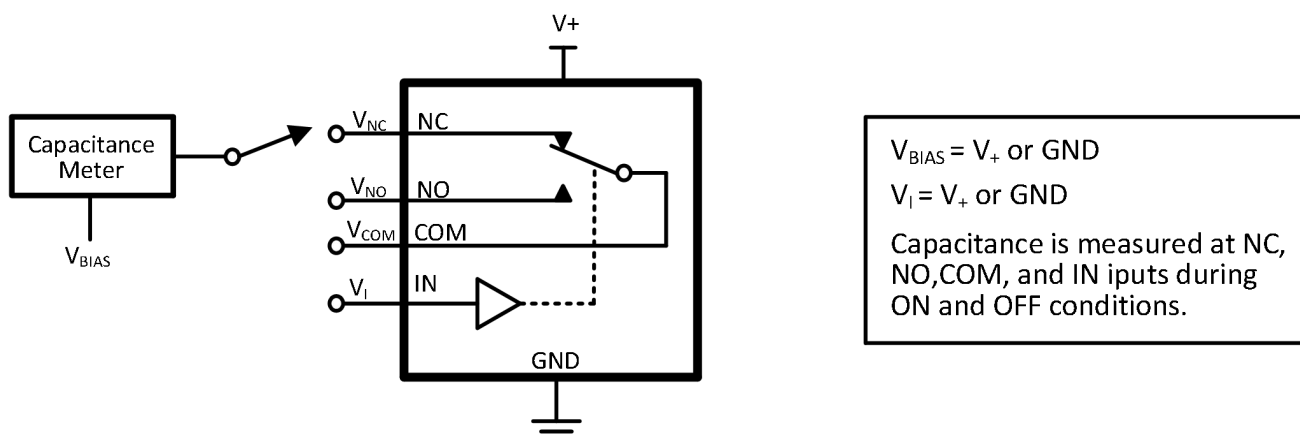


Figure 4. Capacitance

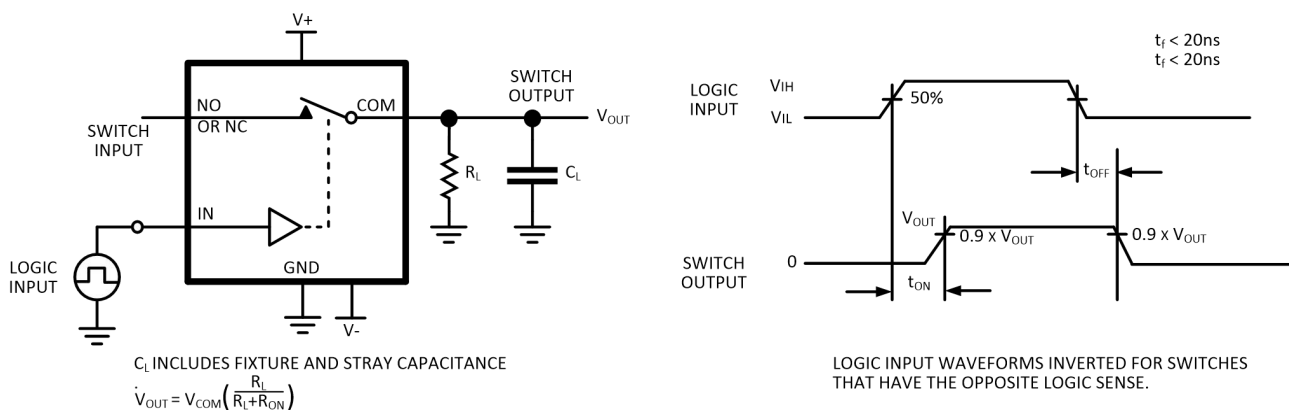


Figure 5. Turn-On (T_{ON}) and Turn-Off Time (T_{OFF})

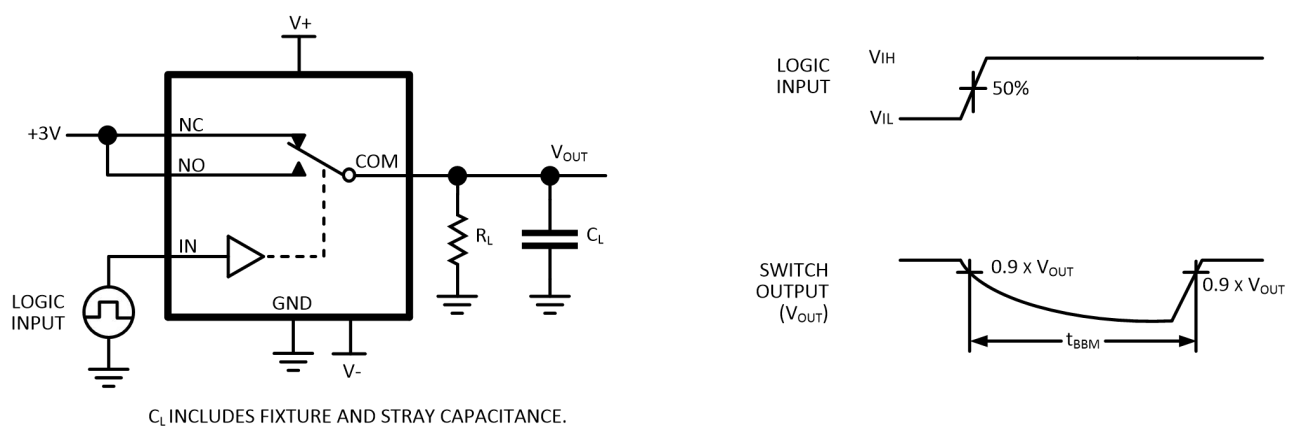


Figure 6. Break-Before-Make Time (T_{BMM})

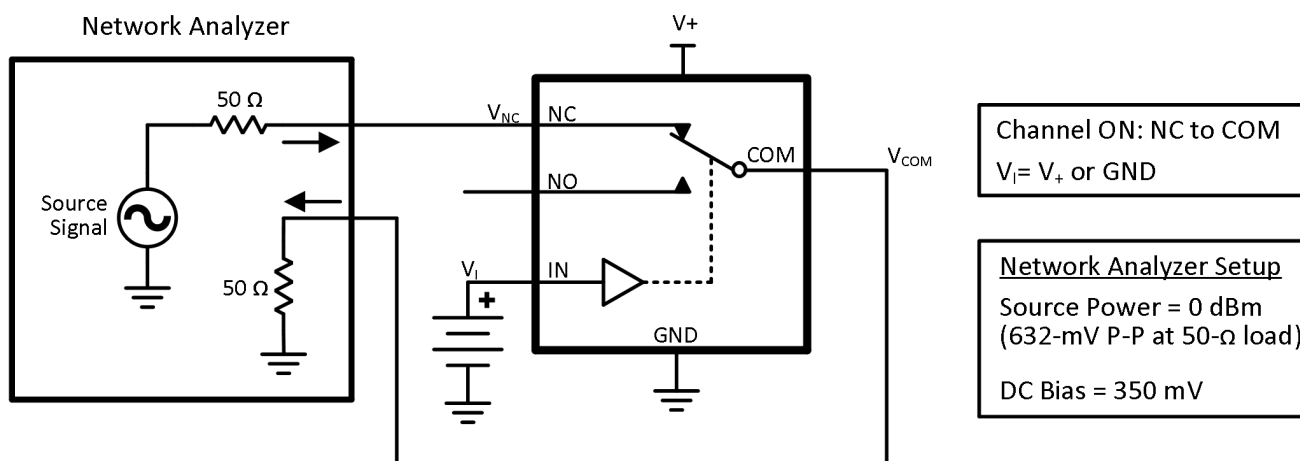
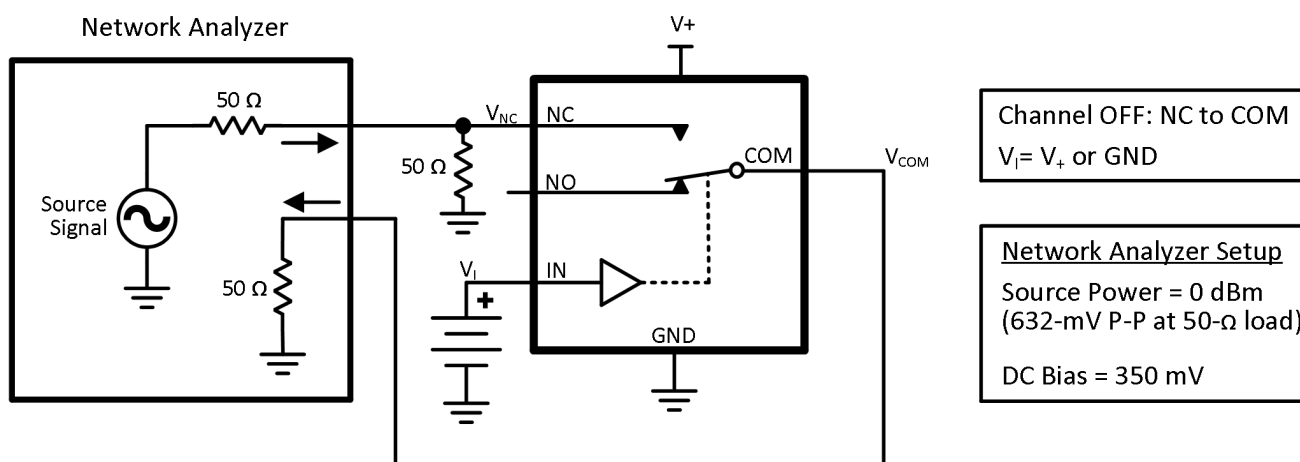
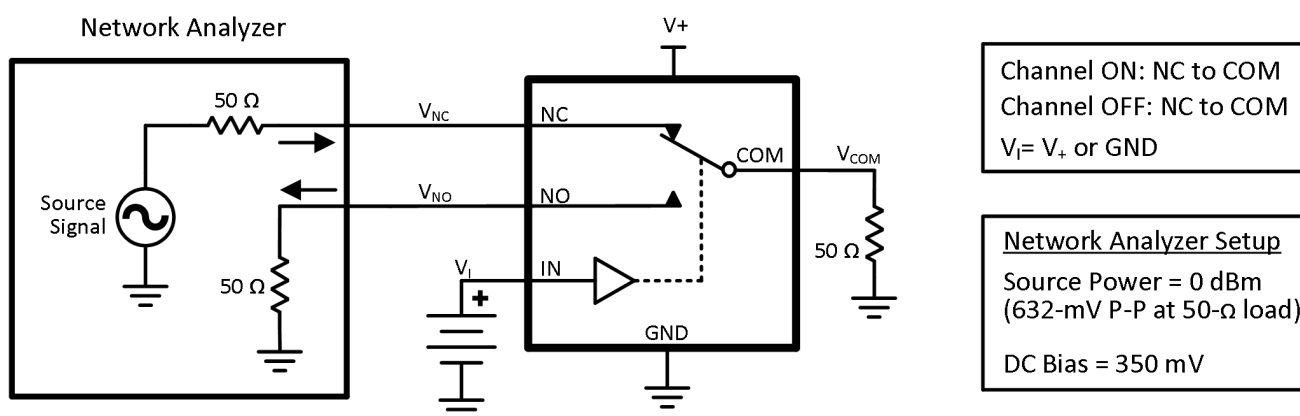


Figure 7. Bandwidth (BW)


 Figure 8. OFF Isolation (O_{ISO})

 Figure 9. Crosstalk (X_{TALK})

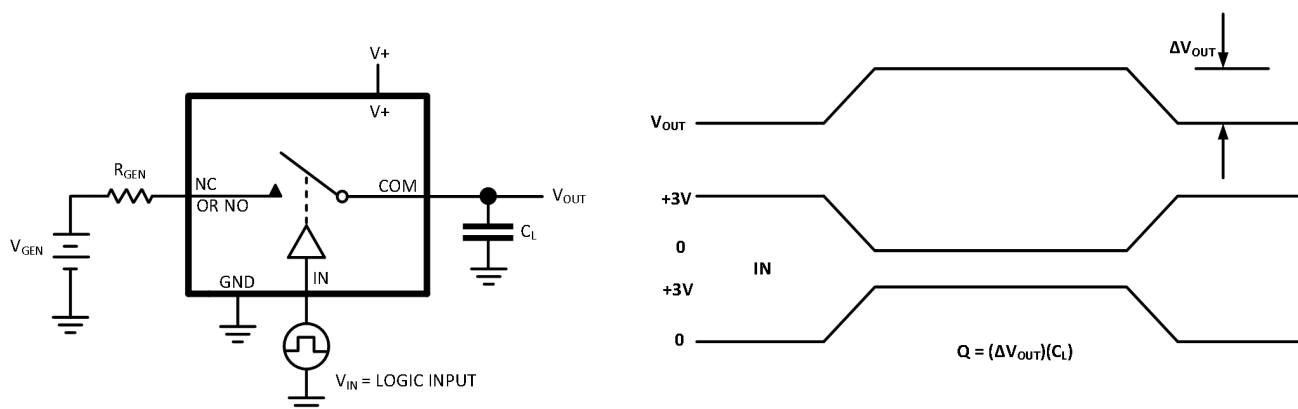


Figure 10. Charge Injection (Q_c)

Channel ON: COM to NO

$V_I = V_{IH}$ or V_{IL}

$R_L = 600\Omega$

$V_{SOURCE} = V+$ P-P

$f_{SOURCE} = 20\text{ Hz to }20\text{ kHz}$

$C_L = 50\text{ pF}$



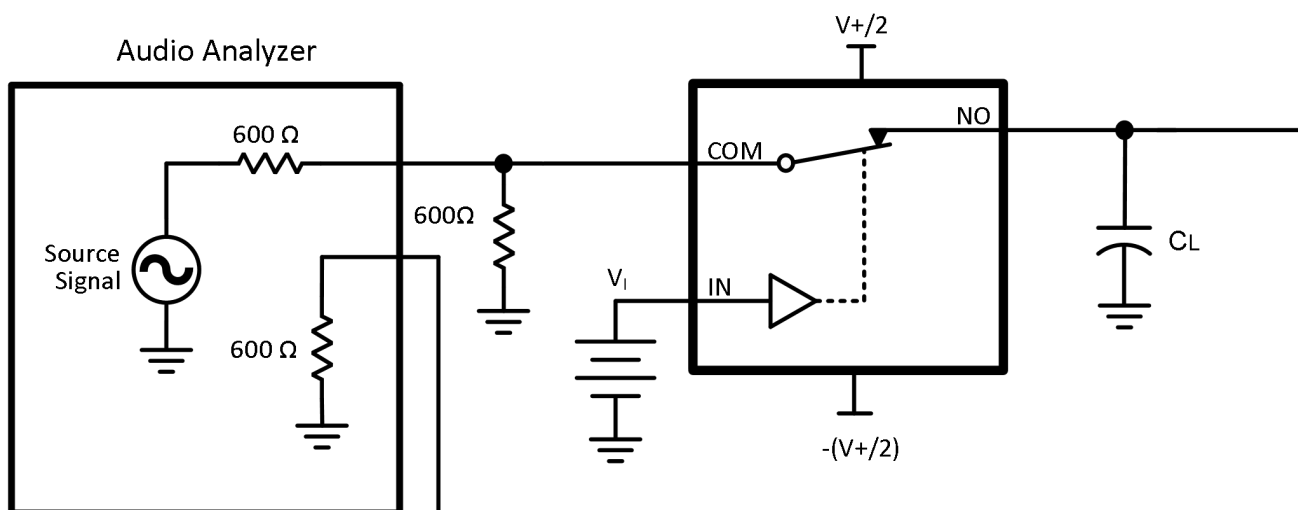


Figure 11. Total Harmonic Distortion (THD)

5. Package Information

5.1 MSOP10 (Package Outline Dimensions)

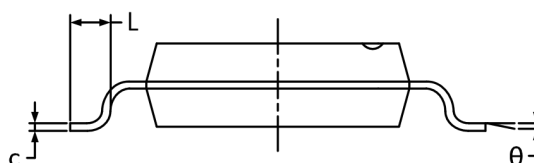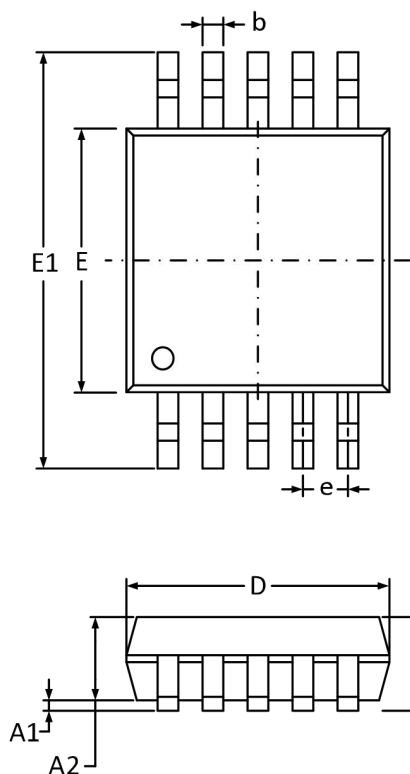

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.820	1.100	0.032	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.180	0.280	0.007	0.011
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
E	2.900	3.100	0.114	0.122
E1	4.750	5.050	0.187	0.199
e	0.500 BSC		0.020 BSC	
L	0.400	0.800	0.016	0.031
θ	0°	6°	0°	6°